



Kalrez[®] perfluoroelastomer
parts

From DuPont Performance Elastomers

Kalrez[®] AeroSeal[™] 7797

Product Description

Kalrez[®] AeroSeal[™] 7797 is a specialty black product specifically targeted for use in applications requiring high hardness/higher modulus properties. It offers outstanding thermal stability and compression set resistance and has excellent seal force retention properties. It also offers excellent resistance to HTS (High Thermo-Oxidative Stability) gas turbine engine lubricating oils and has excellent response to temperature cycling effects. Kalrez[®] AeroSeal[™] 7797 has excellent mechanical properties and is well suited for both static and dynamic sealing applications. A maximum continuous service temperature of 325°C (617°F) is suggested. Short excursions to higher temperatures may also be possible.

Typical Physical Properties ¹

Color	Black
Hardness, Shore A ²	90
50% Modulus ³ , MPa (psi)	15.91 (2308)
Tensile Strength at Break ³ , MPa (psi)	23.84 (3458)
Elongation at Break ³ , %	77
Compression Set ⁴ , 70 hr @ 204°C, %	11
Temperature of Retraction, Tr10 ⁵ , °C (°F)	-5 (23)
Maximum Continuous Service Temperature ⁶ , °C (°F)	325°C (617°F)

¹ Not to be used for specification purposes

² ASTM D2240 (pellet test specimens)

³ ASTM D1414 & D412 (AS568 K214 O-ring test specimens)

⁴ ASTM D1414 & D395B (AS568 K214 O-ring test specimens)

⁵ ASTM D1329 (dumbbell test specimens/test specimens stretched 25%)

⁶ DuPont Performance Elastomers proprietary test method


Performance Features/Benefits

- Outstanding thermal stability
- Outstanding compression set resistance
- Excellent seal force retention properties
- Excellent resistance to high thermo-oxidative stability (HTS) gas turbine engine lubricating oils
- Excellent response to temperature cycling effects
- Excellent mechanical properties
- Lower coefficient of thermal expansion (CTE) versus other Kalrez[®] products thus minimizing the need to increase the free volume of the seal gland when upgrading from fluoroelastomers (FKM) to perfluoroelastomers (FFKM)

Resistance To Standard And HTS Gas Turbine Engine Lubricating Oils

For many applications, low volume swell of elastomers is critical for proper equipment operation. Excessive swell can lead to material softening, "nibbling", extrusion, etc., causing premature seal failure to occur. While other physical property testing may be needed to adequately define product performance in a particular application, volume swell has historically been used as an indicator of an elastomers' chemical resistance to a particular fluid. Figure 1 shows the long-term volume swell for Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS versus three different types of FKM compounds in both standard and HTS (High Thermo-oxidative Stability) gas turbine engine lubricating oils after 1008 hours @ 232°C (450°F). Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS exhibited significantly lower volume swell versus the FKM compounds tested.

Figure 1
Long-Term Volume Swell In Standard* & HTS Gas Turbine Engine Lubricating Oils¹**
 1008 Hours at 232°C (450°F) - Oil Changed Weekly²

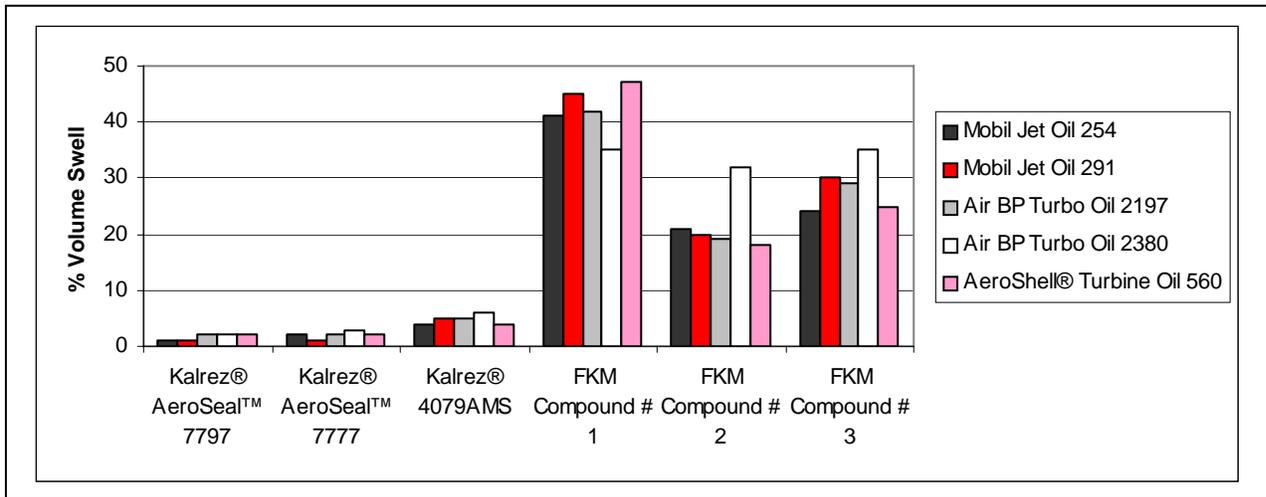

¹ Not to be used for specification purposes


² ASTM D471 (dumbbell test specimens)

* Air BP Turbo Oil 2380 = standard lubricating oil

** Mobil Jet Oil 254, Mobil Jet Oil 291, Air BP Turbo 2197 & AeroShell® Turbine Oil 560 = HTS (High Thermo-Oxidative Stability) lubricating oils

Figure 2 shows the long-term compression set properties of Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS versus three different types of FKM compounds in HTS gas turbine engine lubricating oils after 1008 hours at 232°C (450°F). Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS exhibited better resistance to compression set versus the FKM compounds tested.

Figure 2
Long-Term Compression Set In HTS* Gas Turbine Engine Lubricating Oils¹
 1008 Hours at 232°C (450°F) - Oil Changed Weekly²

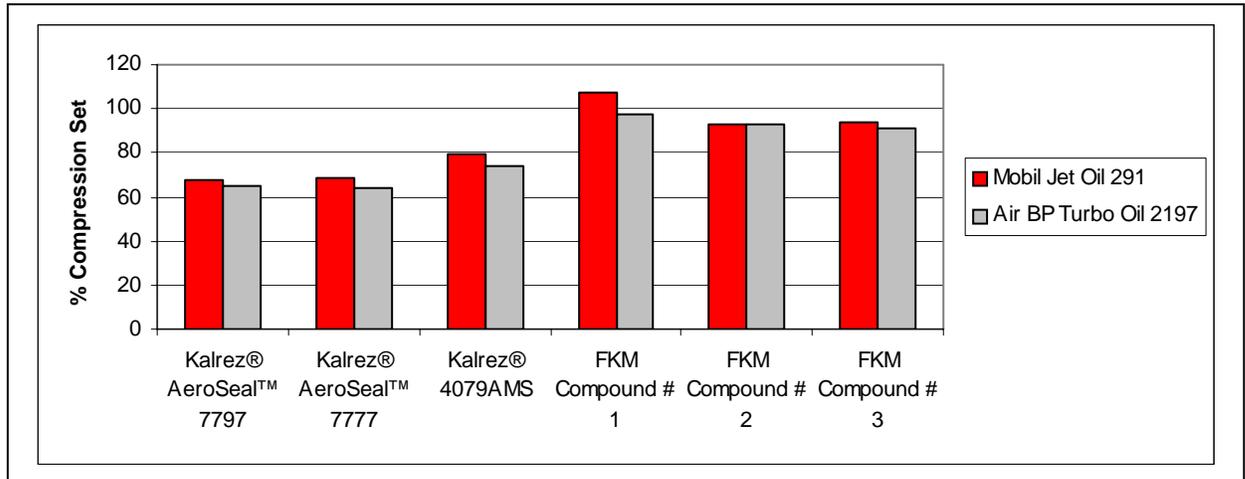

¹ Not to be used for specification purposes

² ASTM D395B & D1414 (AS568 K214 O-ring test specimens)

* Mobil Jet Oil 291 & Air BP Turbo Oil 2197 = HTS (High Thermo-Oxidative Stability) lubricating oils

For further information please contact one of the offices below, or visit our website at www.dupontelastomers.com/kalrez

Global Headquarters – Wilmington, DE USA

Tel. +1-800-853-5515
+1-302-792-4000
Fax +1-302-792-4450

European Headquarters - Geneva

Tel. +41-22-717-4000
Fax +41-22-717-4001

South & Central America Headquarters - Brazil

Tel. +55-11-4166-8978
Fax +55-11-4166-8989

Asia Pacific Headquarters - Singapore

Tel. +65-6275-9383
Fax +65-6275-9395

Japan Headquarters – Tokyo

Tel. +81-3-5521-2990
Fax. +81-3-5521-2991

The information set forth herein is furnished free of charge and is based on technical data that DuPont Performance Elastomers believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. While the information presented here is accurate at the time of publication, specifications can change. Check www.dupontelastomers.com for the most up-to-date information.

Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont Performance Elastomers customer service representative and read Medical Caution Statement H-69237.

DuPont™ is a trademark of DuPont and its affiliates.

Kalrez® and Kalrez® AeroSeal™ are registered trademarks or trademarks of DuPont Performance Elastomers.

Mobil™ is a trademark of Mobil.

AeroShell® is a registered trademark of Shell Aviation.

Copyright © 2006 DuPont Performance Elastomers. All Rights Reserved.