
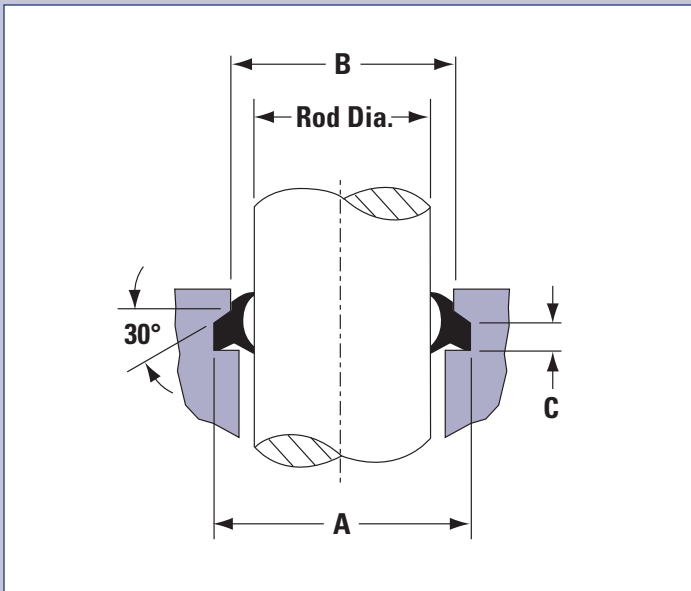


Style KW Rod Wipers

Double lip design provides the ultimate in wiper action to remove foreign material from the exposed rod while still maintaining an adequate lubricating film. It protects both the rod and the primary seal. Molded in 90 Durometer Urethane for maximum strength abrasion resistance.

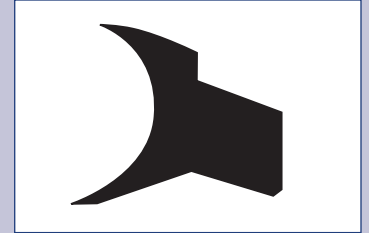

Tolerances

A +.005 / -.000

B +.000 / -.005

C +.005 / -.000

Style KW Rod Wipers

DMR Part Number	A - Rod Diameter	B - Groove I.D.	C - Base Thickness
KW-0500	1/2	3/4	.156
KW-0625	5/8	7/8	.156
KW-0750	3/4	1-1/8	.190
KW-0875	7/8	1-1/4	.190
KW-1000	1	1-3/8	.190
KW-1125	1-1/8	1-1/2	.190
KW-1250	1-1/4	1-5/8	.190
KW-1250N	1-1/4	1-5/8	.190
KW-1375	1-3/8	1-3/4	.190
KW-1500	1-1/2	1-7/8	.190
KW-1625	1-5/8	2	.190
KW-1750	1-3/4	2-1/8	.190
KW-2000	2	2-3/8	.190
KW-2125	2-1/8	2-1/2	.190
KW-2250	2-1/4	2-3/4	.250
KW-2250-1	2-1/4	2-5/8	.187
KW-2450N	2.450	3	.281
KW-2500	2-1/2	3	.250
KW-2500N	2-1/2	3	.250
KW-2625	2-5/8	3-1/8	.250
KW-2750	2-3/4	3-1/4	.250
KW-3000	3	3-1/2	.250
KW-3000N	3	3-1/2	.250
KW-3125N	3-1/8	3-5/8	.250
KW-3250	3-1/4	3-3/4	.250
KW-3375	3-3/8	3-7/8	.250
KW-3450N	3.450	4	.243
KW-3500	3-1/2	4	.250
KW-3500-2	3-1/2	3-7/8	.190
KW-3750	3-3/4	4-1/4	.250
KW-3950N	3.95	4.45	.250
KW-4000	4	4-1/2	.250
KW-4060	4-1/16	4-9/16	.250

DMR Part Number	A - Rod Diameter	B - Groove I.D.	C - Base Thickness
KW-4500	4-1/2	5	.250
KW-4500N	4-1/2	5	.250
KW-4750N	4-3/4	5-1/4	.255
KW-4875	4-7/8	5-3/8	.250
KW-5000	5	5-1/2	.250
KW-5250N	5-1/4	5-3/4	.250
KW-5375	5-3/8	5-7/8	.250
KW-6000	6	6-1/2	.250
KW-7000	7	7-1/2	.250
KW-8000	8	8-1/2	.255
KW-8000N	8	8-1/2	.255
KW-8125	8-1/8	8.63	.255
KW-9125	9-1/8	9.63	.255
KW-9375	9-3/8	9.89	.255