




BABSL Seals

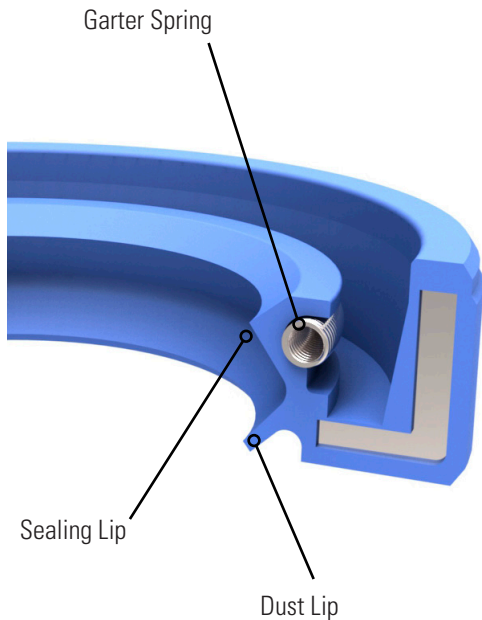

BABSL high pressure rotary seals, available in metric and imperial sizes to suit a wide variety of applications. Pressure resistant style for use without back-up ring, dust lip to protect against outside contaminants, rated up to 10 Bar (depending on other operating conditions).

Applications:

Sealing in pressurized environments without additional backup rings e.g. for rotational pressure sealing in hydraulic pumps, hydraulic motors, hydrodynamic couplings. Particularly suitable for sealing low viscosity and gaseous media.

Material:

NBR 72 Shore A, also available in FKM and HNBR.



Media: Mineral oils, Synthetic oils

Temperature:

-40°C to +100°C (Material 72 Nitrile NBR 902)

-49°C to +160°C (Material 75 Viton FKM 595)

Surface Speed: Up to 5 m/s

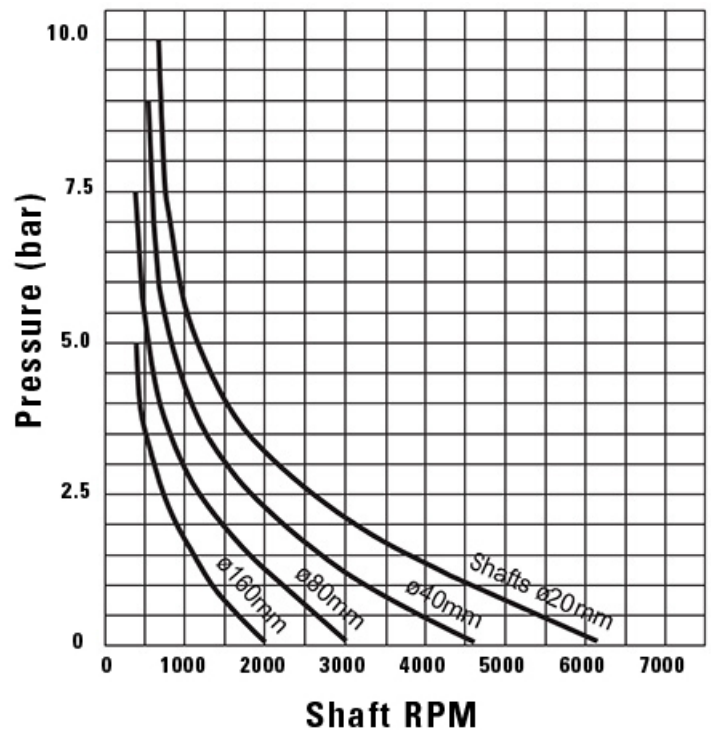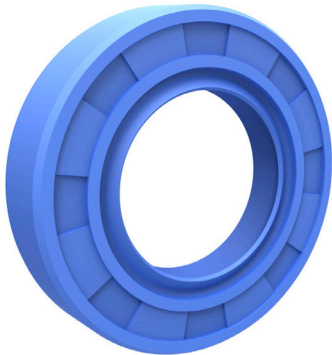

Essential components for industry

www.daemar.com

T4A-021

Oakville, ON
905.847.6500

Dorval, QC
514.636.3113

Edmonton, AB
780.435.8899

Atlanta, GA
770.953.4710

www.daemar.com