

# DuPont™ Kalrez® AeroSeal™ 7797

Technical Information — Rev. 1, July 2010

## Product Description

DuPont™ Kalrez® AeroSeal™ 7797 perfluoroelastomer parts are a specialty black product specifically targeted for use in applications requiring high hardness/higher modulus properties. It offers outstanding thermal stability and compression set resistance and has excellent seal force retention properties. It also offers excellent resistance to HTS (High Thermo-Oxidative Stability) gas turbine engine lubricating oils and has excellent response to temperature cycling effects. Kalrez® AeroSeal™ 7797 has excellent mechanical properties and is well suited for both static and dynamic sealing applications. A maximum continuous service temperature of 325 °C (617 °F) is suggested. Short excursions to higher temperatures may also be possible.

## Typical Physical Properties<sup>1</sup>

Color	Black
Hardness, Shore A <sup>2</sup>	90
50% Modulus <sup>3</sup> , MPa (psi)	15.91 (2310)
Tensile Strength at Break <sup>3</sup> , MPa (psi)	23.84 (3460)
Elongation at Break <sup>3</sup> , %	77
Compression Set <sup>4</sup> , 70 hr at 204 °C, %	11
Temperature of Retraction, Tr10 <sup>5</sup> , °C (°F)	-5 (23)
Maximum Continuous Service Temperature <sup>6</sup> , °C (°F)	325 (617)

<sup>1</sup> Not to be used for specification purposes

<sup>2</sup> ASTM D2240 (pellet test specimens)

<sup>3</sup> ASTM D1414 and D412 (AS568 K214 O-ring test specimens)

<sup>4</sup> ASTM D1414 and D395B (AS568 K214 O-ring test specimens)

<sup>5</sup> ASTM D1329 (dumbbell test specimens/test specimens stretched 25%)

<sup>6</sup> DuPont proprietary test method

## Performance Features/Benefits

- Outstanding thermal stability
- Outstanding compression set resistance
- Excellent seal force retention properties
- Excellent resistance to high thermo-oxidative stability (HTS) gas turbine engine lubricating oils
- Excellent response to temperature cycling effects
- Excellent mechanical properties
- Lower coefficient of thermal expansion (CTE) versus other Kalrez® products thus minimizing the need to increase the free volume of the seal gland when upgrading from fluoroelastomers (FKM) to perfluoroelastomers (FFKM)




*The miracles of science™*

## Resistance To Standard And HTS Gas Turbine Engine Lubricating Oils

For many applications, low volume swell of elastomers is critical for proper equipment operation. Excessive swell can lead to material softening, "nibbling", extrusion, etc., causing premature seal failure to occur. While other physical property testing may be needed to adequately define product performance in a particular application, volume swell has historically been used as an indicator of an elastomers' chemical resistance to a particular fluid. Figure 1 shows the long-term volume swell for DuPont™ Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS versus three different types of FKM compounds in both standard and HTS (High Thermo-oxidative Stability) gas turbine engine lubricating oils after 1008 hours at 232 °C (450 °F). Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS exhibited significantly lower volume swell versus the FKM compounds tested.

**Figure 1. Long-Term Volume Swell In Standard\* and HTS\*\* Gas Turbine Engine Lubricating Oils<sup>1</sup>**

1008 hours at 232 °C (450 °C) — Oil Changed Weekly<sup>2</sup>

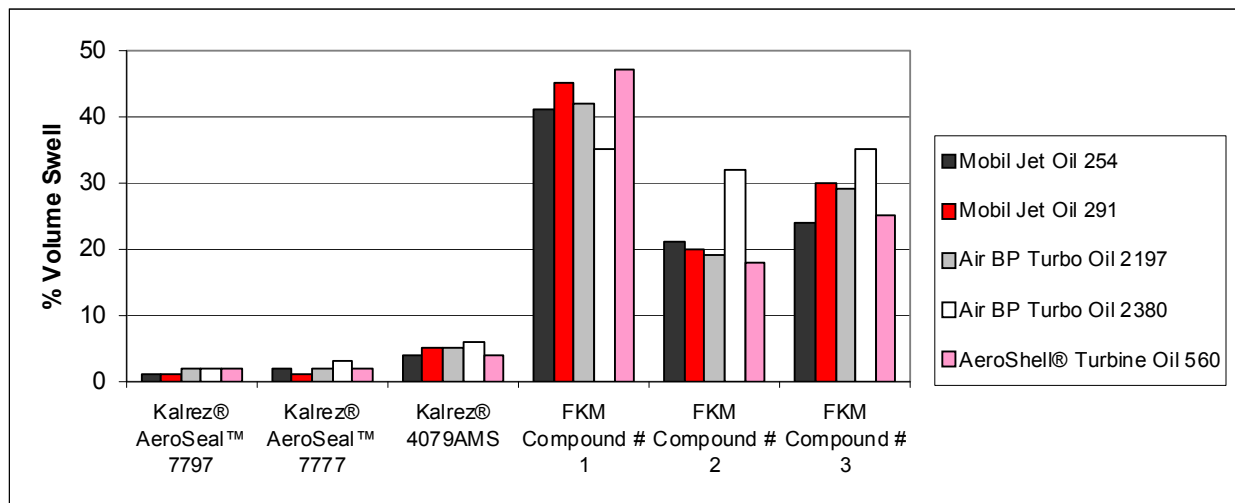

<sup>1</sup> Not to be used for specification purposes

<sup>2</sup> ASTM D471 (dumbbell test specimens)


\* Air BP Turbo Oil 2380 = standard lubricating oil

\*\* Mobil Jet Oil 254, Mobil Jet Oil 291, Air BP Turbo Oil 2197 and AeroShell™ Turbine Oil 560 = HTS (High Thermo-Oxidative Stability) lubricating oils

Figure 2 shows the long-term compression set properties of DuPont™ Kalrez® AeroSeal™ 7797, DuPont™ Kalrez® AeroSeal™ 7777 and DuPont™ Kalrez® 4079AMS versus three different types of FKM compounds in HTS gas turbine engine lubricating oils after 1008 hours at 232 °C (450 °F). Kalrez® AeroSeal™ 7797, Kalrez® AeroSeal™ 7777 and Kalrez® 4079AMS exhibited better resistance to compression set versus the FKM compounds tested.

**Figure 2. Long-Term Compression Set in HTS\* Gas Turbine Engine Lubricating Oils<sup>1</sup>**

1008 hours at 232 °C (450 °F) — Oil Changed Weekly<sup>2</sup>

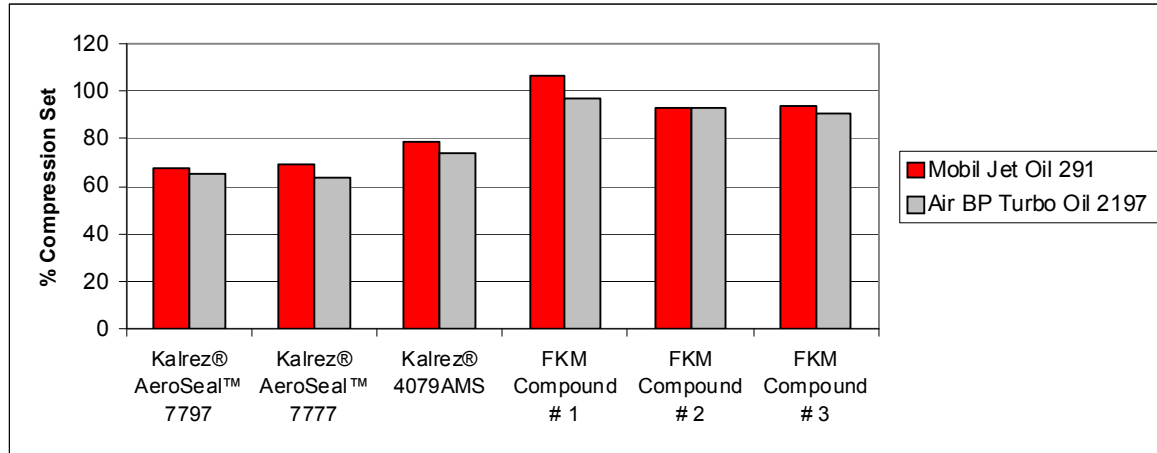

<sup>1</sup> Not to be used for specification purposes

<sup>2</sup> ASTM D395B and D1414 (AS568 K214 O-ring test specimens)

\* Mobil Jet Oil 291 and Air BP Turbo Oil 2197 = HTS (High Thermo-Oxidative Stability) lubricating oils

---

Visit us at [kalrez.dupont.com](http://kalrez.dupont.com) or [vespel.dupont.com](http://vespel.dupont.com)

---

Contact DuPont at the following regional locations:

**North America**  
800-222-8377

**Latin America**  
+0800 17 17 15

**Europe, Middle East, Africa**  
+41 22 717 51 11

**Greater China**  
+86-400-8851-888

**ASEAN**  
+65-6586-3688

**Japan**  
+81-3-5521-8484

---

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

**Caution:** Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer service representative and read Medical Caution Statement H-50103-3.

Copyright © 2010 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, Kalrez®, AeroSeal™, and Vespel® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

Mobil™ is a trademark of Mobil.

AeroShell® is a registered trademark of Shell Aviation.

(08/06) Reference No. KZE-A10536-00-B0710



*The miracles of science™*