



Standard Metal Clad Seal

Large Diameter Oil Seal Specialists

NITRILE

SILICONE

VITON®


PTFE

- Capable of being retrofitted for all other manufacturers types.
- Excellent for most mineral oils and greases.
- Design can be manufactured from 3 Bar to 12 Bar (44 psi to 176 psi).
- Can perform in dry running conditions only intermittently.


For multi-lip designs please contact a Daemar technical sales representative.

861 Cranberry Court
Oakville, ON L6L 6J7

Phone: (905) 847-6500
Fax: (905) 847-6943
email: sales@daemarinc.com

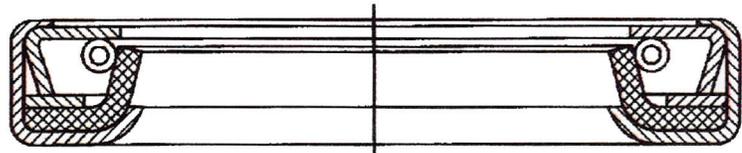

SECTION 'AA'

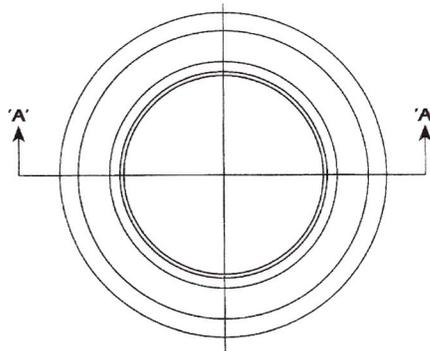

METAL MATERIALS

Outer/Inner shell and base washer:	Mild steel as standard
Garter Spring:	Galvanized steel as standard

Also available in non ferrous metals.

Outer Diameter Sizes	Maximum shaft speed	Temperature Range
50mm to 1727mm (2" to 68")	15m/s (49 ft/s)	-54°C to 120°C (-65°F to 248°F)

Essential components for industry

www.daemar.com